




ELEMAN DENT FOR DENTAL SUPPLIES




Facebook

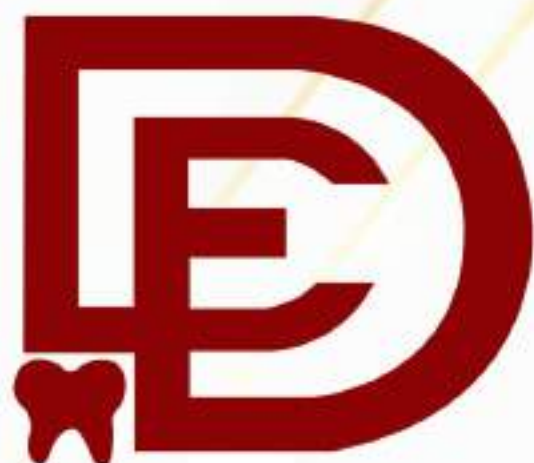

Telegram



Eleman Dent



📍 **Cairo** : 3 Ibn Hani Al-Andalusi Street - off Tayaran Street
- in front of KFC - Nasr City - Egypt
☎ 02 240 45 299 ☎ 010 33 228 012 - 0122 36 32 892
📍 **Sharkia** : Zagazig - Behind Almagbara Hospital
☎ 055 237 85 49 ☎ 010 50 27 8991 - 010 60 344 331
✉ eleman.ms2@gmail.com 🌐 Eleman Dent

Print By Abo Ammar
01228623910

COXO®

C-SMART-MINI(LED) Wireless Endo motors

Technical:
Adaptor working voltage:
AC100-240V. 50/60Hz
Power consumption: 20VA
Rated torque: 0.6-3.9N.cm
rotational speed ranging:
125rpm-625rpm
Charge battery:
DC.3.7V 1200mAh



C-FILL mini Endodontic Obturation System

Technical:
Adapter: Input AC100~
240V 50/60Hz
Output: DC 5V,1.5A
Battery: Rechargeable
Li-ion battery(DC3.7V 2000mAh)
Degree of protection
against electric
shock: Type B equipment



DB686 Swift Curing light

Technical:
Adapters: AC100-240V, 50/60Hz
Wide spectrum: 385-515nm
Light power: >1000mw/cm/cm2
Curing time: 5s/10s/15s/20s (Soft up mode)
5s (High power mode)
1-8times (Orthodontic mode)



DB686 LATTE LED Curing lights

Technical:
Power adaptor: AC100-240V, 50/60Hz
wavelength: 420-480nm
Light power: ≥1200mW/cm²
Solidification time and depth: 5s3mm



ALPHA AIRE

HIGH & LOW SPEED HANDPIECE

101D LED PRO Specifications:

Torque head
LED Generator Handpiece
Push button - 4 hole
GERMANY Ceramic bearings
Stainless housing - 6 water spray
400,000R.P.M max



101D PRO Specifications:

Torque head
Push button - 4 hole
GERMANY Ceramic bearings
Stainless housing - 6 water spray
400,000R.P.M max



101C CERAMIC Specifications:

Torque head
LED Generator Handpiece
Push button - 4 hole
A-CLASS Ceramic bearings
Stainless housing - 3 water spray



MC-104 MINI HEAD Specifications:

MINI head diameter 8.6mm
Slim body design
Reach any part of the treatment of oral cavity
Push button - 4 hole
* 3500,000-400,000 R.P.M max
- A-CLASS Ceramic bearings



MC-105 ANGEL45 Specifications:

Standard head
Push button - 4 hole
A-CLASS Ceramic bearings
Single water spray - 3500,000-400,000 R.P.M max



101C CERAMIC Specifications: (Air motor - Angle - Straight)

Working pressure 0.3mpa - 0.345mpa
Applicable burs 2.335mm-2.355mm
Turn speed 20000 - 30000 min



Alpha Endo

Rotary Endodontic file Heat Treated Niti Files

More Cutting
Better Flexibility

CM Wire & Gold Treatment
Germany Technology



ALPHA PRO PLUS Rotary files

21mm / 25mm / 31mm, 5pcs/pack

DESCRIPTION	ORFICE OPENER	# 17	# 20	# 25	# 30
TAPER	12%	4%	4%	4%	4%
MODEL	# 17	# 17	# 20	# 25	# 30
SPEED	350	350	350	350	350
TORQUE	2	15	15	2	2



ALPHA PRO+ PATH

Rotary files
[1302vt] 25mm, 4pcs/pack



ALPHA PRO+ SPECIAL

Rotary files
[4004, 4504, 5004]
25mm, 3pcs/pack



ALPHA PRO

Rotary files
[1712*2, 1805*2, 2506*2]

25mm, 6pcs/pack

DESCRIPTION	ORFICE OPENER	# 18	# 25
TAPER	12%	5%	6%
MODEL	# 17	# 18	# 25
SPEED	350	300	350
TORQUE	2	2	2



ALPHA RT, ASSORTED

Rotary files
(#20/07*2pcs, #25/08*2pcs, #30/09*2pcs),
6PCS/PACK

